

# TOTALLY AUTOMATIC PORTABLE REFRIGERANT RECOVERY UNIT, OIL-LESS



# AR1UL



## FOR USE WITH

- Group III** R12, R134A, R401C, R406A, R500  
**Group IV** R401A, R409A, R401B, R412A, R411A, R407D, R22, R411B, R502, R407C, R402B, R408A, R509 & Blends\*

**One Step Recovery**  
**No Switching Hoses!**  
**SUBCOOL FEATURE**



ARI  
Air Conditioning &  
Refrigeration Institute



## Features

- One step recovery
- Automatic sensing of liquid and vapor
- No switching hoses
- Attractive tool box design
- Tool and accessory compartment
- Tank overfill protection
- Self clearing mode
- Comes with 4 positive shut-off hoses and 50 Lb. cylinder
- UL Listed
- Automatic shut-off at 10" Vacuum
- 053 drier supplied


## Specifications

Power: 9 Amps, 115 Volt, 60 Hz, 1PH  
 Unit Weight: 46 Lbs  
 Shipping Weight: 59 Lbs  
 Connections: 3/8" MFL  
 Dimensions: 10.25" L x 22" W x 11" H

## Applications

- Commercial A/C
- Commercial Refrigeration
- Roof Top Units
- Ice Machines
- Residential A/C
- Appliances
- Vending Machines

## Recovery Diagram

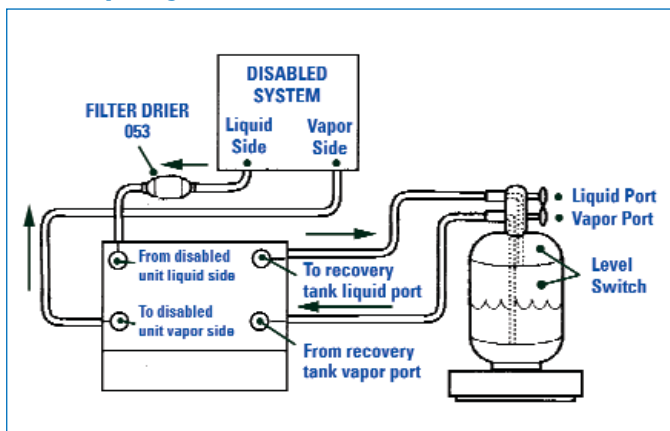

## RATED IN ACCORDANCE WITH ARI STANDARD 740-98

Refrigerant Groups	Push/Pull Liquid Refrigerant	Vapor Refrigerant	Shut-Off Vacuum
III	10.8 lbs./min.	0.35 lbs./min.	10"
IV	11.5 lbs./min.	0.50 lbs./min.	0"

\* May not be applicable for all refrigerant blends. Consult factory for proper application.

RECOVERY EQUIPMENT

