



GS3700



PORTABLE REFRIGERANT RECOVERY UNIT, OIL-LESS

RECOVERY EQUIPMENT



FOR USE WITH:

Group III R12, R134a, R401C, R406A, R500

Group IV R401A, R409A, R401B, R412A, R411A, R407D, R22, R411B, R502, R407C, R402B, R408A, R509

Group V R407A, R404A, R402A, R507, R407B, R410A



UL CERTIFIED
Per ARI Standard 740-98
To meet or exceed EPA regulations.
For use with class III, IV and V refrigerants.

Features: GS3700

- Fastest overall recovery rates in its class
- Rugged high density double walled housing
- Self purge to prevent cross contamination
- Pumps liquid or vapor at the same time
- Powerful 1 HP oil-less compressor
- Built in suction filter
- Low pressure shut-off
- High pressure shut-off for R410A

Specifications

Power: 1 HP, 115 Volt, 50/60 Hz

Weight: 36 Lbs

Dimensions: 14.50" L x 8" W x 12" H


Applications

- Commercial A/C
- Commercial Refrigeration
- Roof Top Units
- Ice Machines
- Residential A/C
- Appliances


Features: GS3710

- Same as above
- Overfill sensor cord

Direct Liquid/Vapor Recovery Diagram

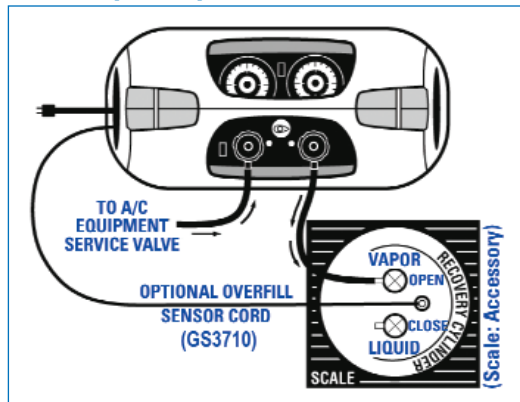

Liquid Push-Pull Recovery Diagram

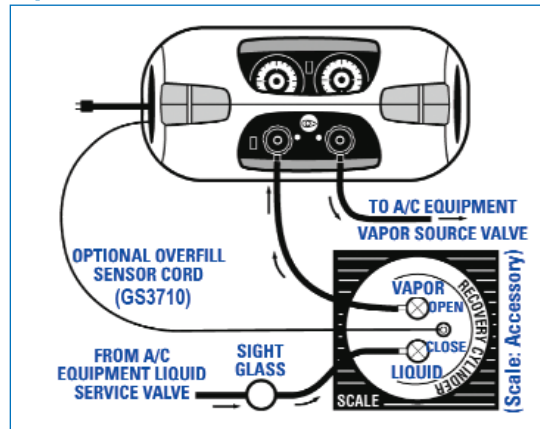

RATED IN ACCORDANCE WITH ARI STANDARD 740-98

Refrigerant Groups	Push/Pull Liquid Refrigerant	Liquid Refrigerant	Vapor Refrigerant	Shut-Off Vacuum
III	13.88 lbs./min.	4.74 lbs./min.	0.33 lbs./min.	10"
IV	15.80 lbs./min.	6.86 lbs./min.	0.49 lbs./min.	10"
V	15.36 lbs./min.	6.50 lbs./min.	0.51 lbs./min.	10"