

PORTABLE REFRIGERANT RECOVERY UNIT

LV2000



RECOVERY EQUIPMENT

For use with:

- Group III** R12, R134a, R401C, R406A, R500
- Group IV** R401A, R409A, R401B, R412A, R411A, R407D, R22, R411B, R502, R407C, R402B, R408A, R509
- Group V** R407A, R404A, R402A, R507, R407B, R410A



ARI
Air Conditioning &
Refrigeration Institute



Features: LV2000

- Patented pump-out feature
- Patented compressor sight glass for monitoring of oil level and easy access compressor oil drain
- Electrical cord wrap
- Low cost
- Easy to use
- Attractive, compact design
- **EPA and ARI certified**

Features: LV2001

- Same as above
- 3 positive shut-off hoses and liquid sight/glass

Specifications

Power: 8 Amps, 115 Volt, 60 Hz, 1PH (**LV2000, LV2001**)
4 Amps, 220 Volt, 50 Hz, 1PH (**LV2002**)

Unit Weight: 47 Lbs

Shipping Weight: 54 Lbs

Dimensions: 20" L x 10.50" W x 15" H


Connections: 1/4" MFL

Oil Charge: 150 Alkyl Benzene


Applications

- Commercial A/C
- Ice Machines
- Commercial Refrigeration
- Residential A/C
- Roof Top Units
- Appliances

Liquid Recovery Diagram

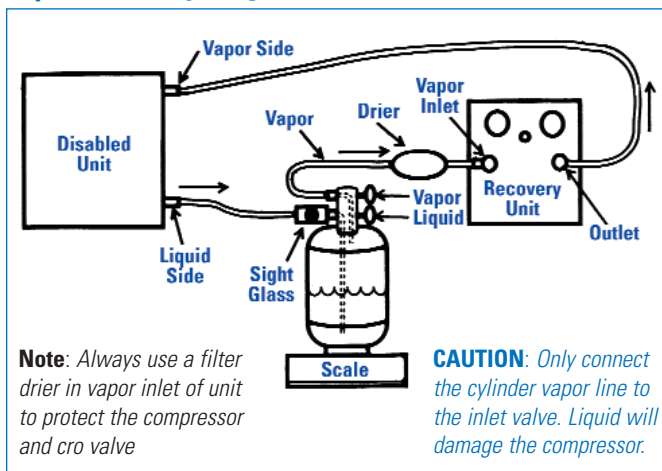

Vapor Recovery Diagram

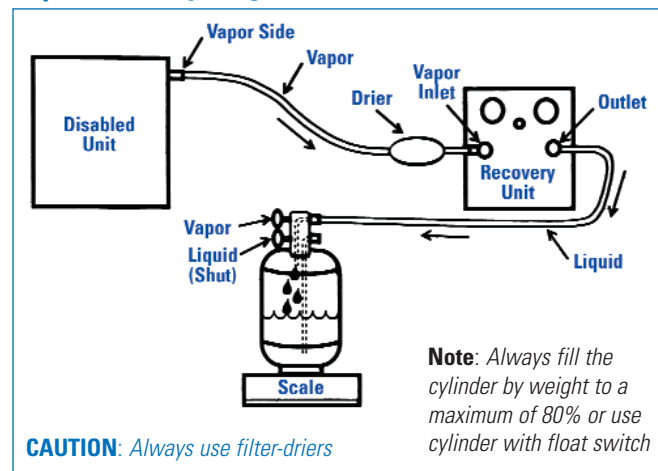

RATED IN ACCORDANCE WITH ARI STANDARD 740-98

Refrigerant Groups	Push/Pull Liquid Refrigerant	Vapor Refrigerant	Shut-Off Vacuum
GR III	10.25 lbs./min.	0.48 lbs./min.	10"
GR IV	11.00 lbs./min.	0.46 lbs./min.	10"
GR V	8.30 lbs./min.	0.33 lbs./min.	10"