



# REVAC



## COMBINATION OIL-LESS REFRIGERANT RECOVERY UNIT AND VACUUM PUMP

RECOVERY EQUIPMENT



### FOR USE WITH

- Group III** R12, R134A, R401C, R406A, R500
- Group IV** R401A, R409A, R401B, R412A, R411A, R407D, R22, R411B, R502, R407C, R402B, R408A, R509 & Blends\*

**Patented True Vacuum Pump  
Pulls 500 Microns!**



ARI  
Air Conditioning &  
Refrigeration Institute



### Features for REVAC and REVAC-UL

- Two units in one!
- 1 HP compressor (1.5 CFM)
- Accessory compartment
- Attractive tool box design
- True vacuum pump - 500 microns
- Manual or auto switching to system evacuation
- 1/4" hose adapters
- 053 drier supplied
- **EPA and ARI Certified**

### Additional Features for REVAC-UL

- Tank overfill protection
- UL listed
- Comes with 3 hoses, a 50 lb. cylinder and sight glass
- Patented pump out feature


### Specifications

Power: 1 HP, 12.5 Amps, 115 Volt, 60 Hz, 1PH  
 Unit Weight: 50 Lbs  
 Shipping Weight: 58 Lbs  
 Dimensions: 10.25" L x 22" W x 11" H  
 Connections: 3/8" MFL


### Applications

- Commercial A/C
- Commercial Refrigeration
- Roof Top Units
- Ice Machines
- Residential A/C
- Appliances
- Vending Machines

### Liquid Recovery Diagram

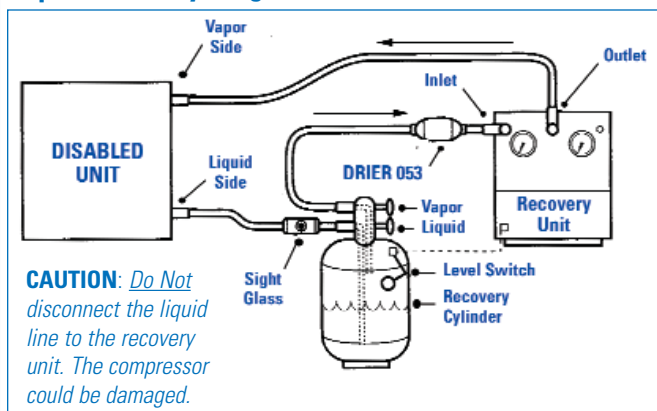

### Vapor Recovery & System Evacuation Diagram

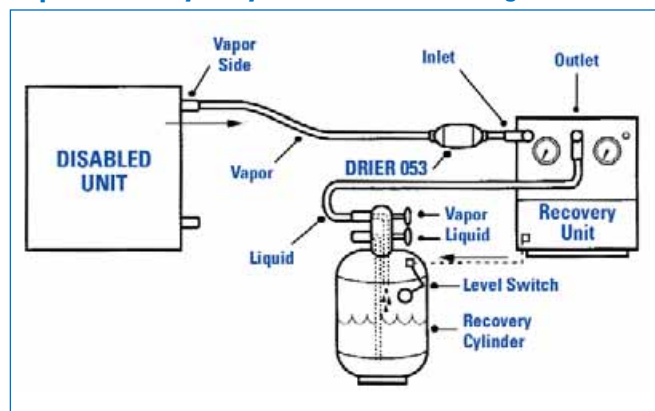

### RATED IN ACCORDANCE WITH ARI STANDARD 740-98

Refrigerant Groups	Push/Pull Liquid Refrigerant	Vapor Refrigerant	Shut-Off Vacuum
GR III	12.35 lbs./min.	0.40 lbs./min.	10"
GR IV	13.05 lbs./min.	0.42 lbs./min.	10"

\* May not be applicable for all refrigerant blends. Consult factory for proper application.